


TPS®/SNA Primary and **TPS®/SNA** (Systems Network Architecture) combine to create a “Virtual SNA Mainframe” software environment on a UNIX® System. TPS®/SNA Primary enhances the flexibility of TPS®/SNA by enabling a single UNIX-based system to support upstream host PU type 4/5 connections to any downstream PU type 2.0 system (such as a 3270 device) or to a host PU4/5 system using Cross Domain support. Standard SNA software implementations in the UNIX environment, including TPS®/SNA, supports traditional PU type 2.0/2.1 connections to host PU type 4/5 systems and PU type 2.1 connections to peer-to-peer networks (APPN). TPS®/SNA Primary offers dependent LU support for LU type 0, 1, 2, 3, 4, and 7. Data link or connection types supported include: SDLC, Token Ring, Ethernet, and Data Link Switching - DLSw (Switch-to-Switch Protocol).

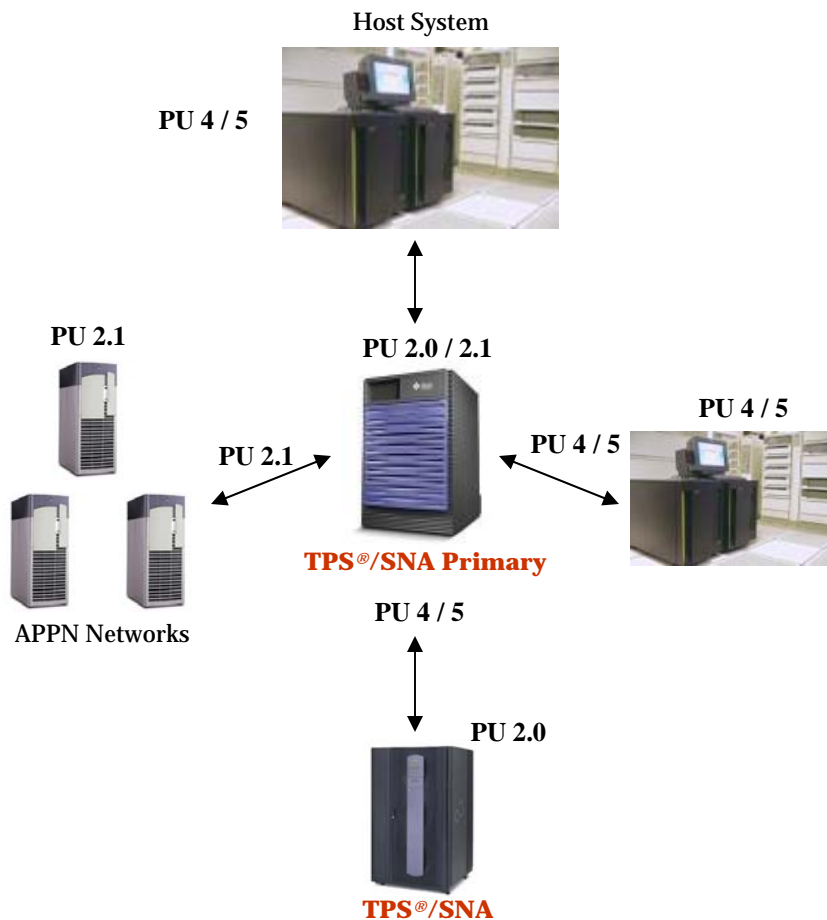

HIGHLIGHTS

- ✓ Robust SNA functionality for high-end SNA environments
- ✓ Upstream host PU type 4/5 connectivity to downstream PU2.0 devices (such as 3270)
- ✓ Upstream host PU type 4/5 connectivity to other PU4/5 host systems using Cross Domain support
- ✓ Executes with **TPS®/SNA** - providing PU2.0/2.1 connectivity to upstream host systems and APPN networks
- ✓ High performance solution with low resource utilization
- ✓ Interfaces with EHLLAPI of LU2 -type API
- ✓ Advanced diagnostic tools for problem determination
- ✓ Very easy installation and configuration
- ✓ Creates a “Virtual SNA Mainframe” environment on a UNIX® system
- ✓ From **TPS® Systems** — with 25+ year tradition of excellence in providing network software and support for large global enterprises

PRODUCT POSITIONING

TPS®/SNA Primary provides the basis for an easy migration from host environments to UNIX®. It is an ideal solution when organizations are:

- Rehosting - moving mainframe applications to (Batch and CICS) a UNIX® environment
- Needing to preserve their investment in existing PU2.0 (3270) devices
- ATMs utilizing **TPS®/PCA**
- Providing PU4/5 support for customers dialing in from downstream PU2.0/2.1 connections or PU4/5 host systems requiring Cross Domain support

TPS®/SNA Primary can be used with **TPS®/SNA to simulate a ‘Virtual SNA Mainframe’. Ideal for company looking to replace their mainframe or write customized applications. With TPS®/SNA API support, **TPS®/SNA** is an excellent fit for developing SNA applications.**

Data-Link Protocol Support

TPS[®]/SNA Primary with TPS[®]/SNA supports many data link types:

- Synchronous Data Link Control (SDLC)
 - Leased or switched connections
 - RS-232, RS-422, V.35, V.25, and SmartModem
- Token Ring
 - IEEE 802.2 LLC
 - IEEE 802.5
 - Multiple connections per Token Ring supported
- Ethernet
 - IEEE 802.2 LLC
 - IEEE 802.3 Ethernet or Standard Ethernet
 - Multiple connections per Ethernet supported
- DLSw connection (SSP)
 - Uses TCP/IP connection
 - PU connection to DLSw router using SSP

SNA PU Protocols

- PU type 4 / 5 support
 - Connection to other PU 4/5 host systems using Cross Domain support
 - Connection to downstream PU type 2.0 systems

SNA LU Protocols

- Dependent LU support for LUs 0, 1, 2, 3, 4, and 7

Management Systems

TPS[®]/SNA Primary is designed for straightforward central site installation/deployment and efficient ongoing manageability. A Management Subsystem provides:

- Installation using the operating system's standard facilities
- Quick and easy configuration
- Full SNA and PU status display
- Error logs
- Complete trace facilities including fully formatted output

Additional Features

- LU prioritization by address or COS
- Multiple PUs on Token Ring or Ethernet
- LU Gateway/Pass thru feature

Network Availability & Resiliency

TPS[®]/SNA Primary provides automatic link restart and standard link error recovery procedures to support mission-critical networks.



14100 San Pedro Avenue, Suite 600
San Antonio, TX USA 78232-4399

Phone: (210) 496-1984

Fax: (210) 490-6805

email: sales@tps.com

<http://www.tps.com>



EVALUATION LICENSES

Evaluation copies of TPS[®] software products are available for a pre-specified timeframe under the terms and conditions of the single-page TPS[®] Evaluation Agreement.

OPERATING ENVIRONMENT

Operating System:

- IBM[®] AIX[®] for IBM[®] pSeries (32 / 64-bit)
- Linux[®] for IBM[®] pSeries (64-bit), Intel[®]/AMD[®] (32-bit), Intel[®] Itanium (64-bit)
- HP-UX[™] for HP9000 (32 / 64-bit)
- HP-UX[™] for HP Integrity (64-bit)
- Sun Solaris[®] for Sparc (32 / 64-bit)
- SCO OpenServer5[®]

Other Requirements:

- A supported communications adapter driver
- [TPS[®]/SNA](#)